



PG-FS Series

Features

- Simple and sturdy design
- Front tempered glass door with ventilation
- Fully perforated rear door for maximising ventilation
- Easy to dismantle front / rear / side doors to enable convenient operation
- Comprehensive range of sizes available
- Colour - Fully epoxit powder coated
- Can be supplied CKD

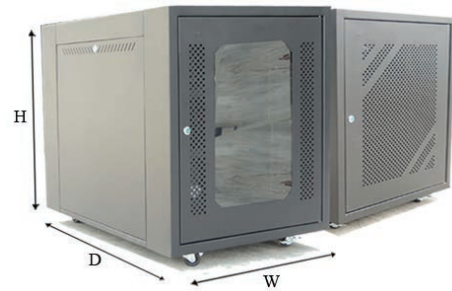


Tempered glass door or fully perforated door

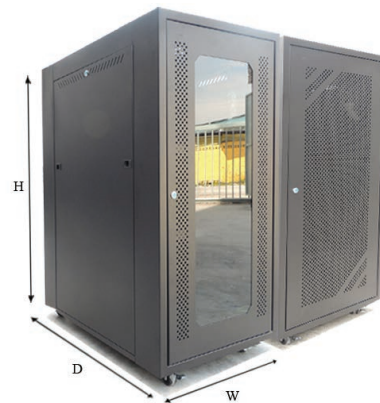

Accessories

- Power distribution unit: Horizontal 19" rack mountable in 1U height
- Shelves: Heavy duty shelves for equipment up to 60kg
 - Cantilever shelf - available in 2U
 - Sliding shelf
 - Vented shelf
- Cooling fan
- Leveling feet
- Cable management panel: 19" panel in 1U height to provide effective cable management
- Blank / Vented panel: Panels to cover unused space at the front of the cabinet. Available in variant sizes
- Chassis runner
- Cage net assembly

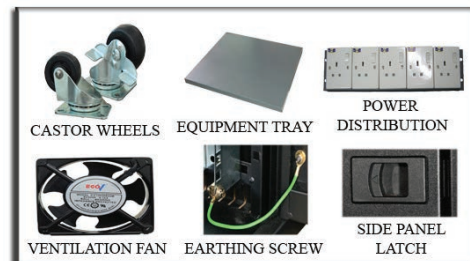

Model	Capacity (U)	Height (mm)	Weight (mm)	Depth (mm)	Packing Dimension (H*W*D)	Volume (CBM)
PG1580FS	15	800	600	800	835 x 612 x 812	0.4149
PG1880FS	18	930	600	800	970 x 612 x 812	0.4820
PG2480FS	24	1200	600	800	1235 x 612 x 812	0.6137
PG2880FS	28	1370	600	800	1415 x 612 x 812	0.7032
PG3380FS	33	1600	600	800	1635 x 612 x 812	0.8125
PG3780FS	37	1780	600	800	1815 x 612 x 812	0.9020
PG4280FS	42	2000	600	800	2035 x 612 x 812	1.0113
PG42100FS	42	2000	600	1000	2035 x 612 x 1012	1.2604

* P = Perforated door, G = Perspex with frame

* Customized sizes available upon request