

1200 Series Cabinet

1200KG Loading Capacity Server Cabinets


Features

- Various sizes and parts are available according to different application demand.
- Welded frame, demountable structure design, light duty but sturdy and flexible.
- Closed-able cable routing at top and bottom panel without tools. Brush panel to prevent dust and outside things.
- Two cable management rails are equipped at the rear of the cabinet for cable management for PDU assembly.
- Embedded side panel, tool free in assembling and dismantling,
- Front door and rear door can be interchanged quickly without tools, opening angle 130°, convenient for equipments installation and maintenance.
- Rotary door handle, keys are universal to front and rear doors for all KH series cabinets.
- With cabinets connector & complete accessories.
- Provided with adjustable feet, maximum static loading is 1500kgs. Surface treatment procedure is degreasing → pickling → anti-rust and phosphorization → water cleaning → powder coating, RoHS compliant.

Standards

Comply with EIA-310-E, IEC297-2, DIN41491 PART1, DIN41494 PART7, GB/T3047.2-92 standard, compatible with ETSI standard.

- 1 Top Panel
- 2 Cable Management Rails
- 3 Mounting Beam
- 4 Side Brace
- 5 Frame
- 6 J Door
- 7 K Door
- 8 Side Panel
- 9 Bottom Panel

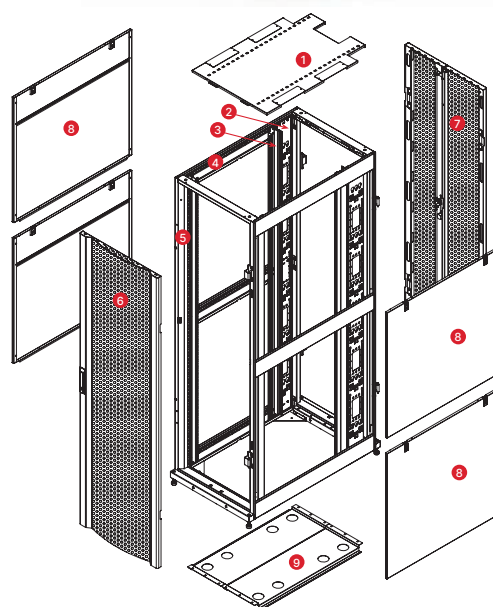

Ordering Information

Model	Capacity (U)	Width (mm)	Depth (mm)	Height (mm)	Packing Dimension (mm)			Volume (CBM)
					Width	Depth	Height	
4268P1200	42	600	800	1992	670	900	2070	1.25
4260P1200	42	600	1000	1992	670	1100	2070	1.53
4261P1200	42	600	1100	1992	670	1200	2070	1.66
4262P1200	42	600	1200	1992	670	1300	2070	1.80
4288P1200	42	800	800	1992	870	900	2070	1.62
4280P1200	42	800	1000	1992	870	1100	2070	1.98
4281P1200	42	800	1100	1992	870	1200	2070	2.16
4282P1200	42	800	1200	1992	870	1300	2070	2.34
4568P1200	45	600	800	2125	670	900	2340	1.41
4560P1200	45	600	1000	2125	670	1100	2340	1.72
4561P1200	45	600	1100	2125	670	1200	2340	1.88
4562P1200	45	600	1200	2125	670	1300	2340	2.04
4588P1200	45	800	800	2125	870	900	2340	1.83
4580P1200	45	800	1000	2125	870	1100	2340	2.24
4581P1200	45	800	1100	2125	870	1200	2340	2.44
4582P1200	45	800	1200	2125	870	1300	2340	2.65