

# 1500 Series Cabinet

## 1500KG Loading Capacity Server Cabinets


### Features

- Various sizes and parts are available according to different application demand.
- Welded frame, demountable structure design, light duty but sturdy and flexible.
- Closed-able cable routing at top and bottom panel without tools. Brush panel to prevent dust and outside things.
- Two cable management rails are equipped at the rear of the cabinet for cable management for PDU assembly.
- Embedded side panel, tool free in assembling and dismantling, lock is optional.
- Front door and rear door can be interchanged quickly without tools, opening angle 130°, convenient for equipments installation and maintenance.
- Rotary door handle, keys are universal to front and rear doors for all KH series cabinets.
- With cabinets connector & complete accessories.
- Provided with adjustable feet, maximum static loading is 1500kgs. Surface treatment procedure is degreasing → pickling → anti-rust and phosphorization → water cleaning → powder coating, RoHS compliant.

### Standards

Comply with EIA-310-E, IEC297-2, DIN41491 PART1, DIN41494 PART7, GB/T3047.2-92 standard, compatible with ETSI standard.

- ① Top Panel
- ② Cable Management Rails
- ③ Mounting Beam
- ④ Side Brace
- ⑤ Frame
- ⑥ J Door
- ⑦ K Door
- ⑧ Side Panel
- ⑨ Bottom Panel

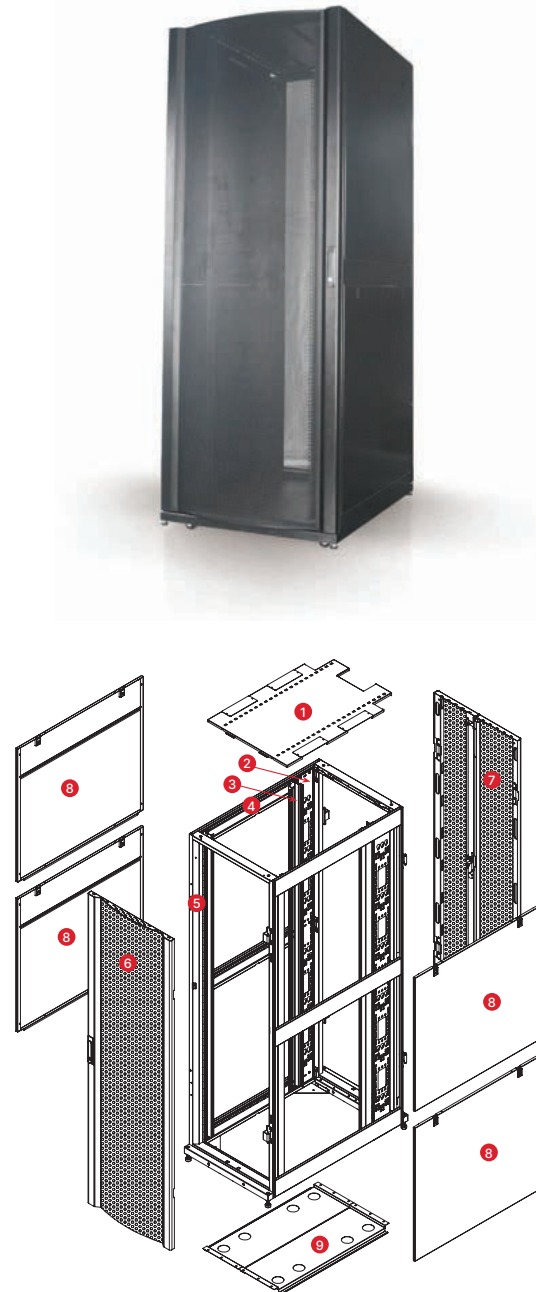

### Ordering Information

Model	Capacity (U)	Width (mm)	Depth (mm)	Height (mm)	Packing Dimension (mm)			Volume (CBM)
					Width	Depth	Height	
4268P1500	42	600	800	1992	670	900	2070	1.25
4260P1500	42	600	1000	1992	670	1100	2070	1.53
4261P1500	42	600	1100	1992	670	1200	2070	1.66
4262P1500	42	600	1200	1992	670	1300	2070	1.80
4288P1500	42	800	800	1992	870	900	2070	1.62
4280P1500	42	800	1000	1992	870	1100	2070	1.98
4281P1500	42	800	1100	1992	870	1200	2070	2.16
4282P1500	42	800	1200	1992	870	1300	2070	2.34
4868P1500	48	600	800	2260	670	900	2340	1.41
4860P1500	48	600	1000	2260	670	1100	2340	1.72
4861P1500	48	600	1100	2260	670	1200	2340	1.88
4862P1500	48	600	1200	2260	670	1300	2340	2.04
4888P1500	48	800	800	2260	870	900	2340	1.83
4880P1500	48	800	1000	2260	870	1100	2340	2.24
4881P1500	48	800	1100	2260	870	1200	2340	2.44
4882P1500	48	800	1200	2260	870	1300	2340	2.65