

ODFWS

86 × 86mm Fibre Wall Socket - Dual Fiber

Overview


The compact fiber wall socket is designed for residential and business applications and holds up to four fiber terminations. This wall box enables the installation of either a single Sirocco Blown Tube cable using up to a 2 fiber blown unit or 2 fiber ruggedized cables to be spliced to 2 SC pigtails (PC or APC). The pigtails would which connect to adapters at the base of the unit.

This box is has a transparent plastic cover on the front adapter side, providing substantial protection to the installed fibers. The unit can be quickly installed within an office, house or communication room environment.



Features

- SC simplex and duplex adapter
- Ergonomic design
- Ability to allow cables to enter from rear or bottom of unit
- 30mm minimum bend radius
- Flip tray to allow access to pigtails and cable entry
- Removable cover for easy access
- Manufactured from fire resistant UL94-Vo rated material
- Standard white color
- Material: ABS + PC

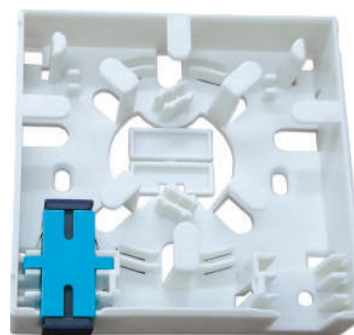

Applications

- FTTx networks
- Data communication networks
- Indoor applications

Specifications

Height	86mm
Weight	86mm
Depth	25mm
Number Of Ports	1 or 2
Max. Splicing Capacity	2 Splices
Suitable For Adapter Type	SC simplex, SC Duplex
Number Of Cable Entry	2
Material	PC+ABS
Color	White
Operating Temperature	-40°C ~ +60°C
Complaint	RoHS, REACH/SvHC