

Trunking Rack Distribution Frame

PG-TR Series

Features


- Simple and sturdy design
- Front tempered glass door with ventilation
- Fully perforated rear door for maximising ventilation
- Easy to dismantle front / rear / side doors to enable convenient operation
- Comprehensive range of sizes available
- Colour - Fully epoxy powder coated
- Can be supplied CKD

Standard Order Comprises of:

- Power distribution unit: Horizontal 19" rack mountable in 1U height
- Shelves: Heavy duty shelves for equipment up to 60kg
 - Cantilever shelf - available in 2U
 - Sliding shelf
 - Vented shelf
- Cooling fan
- Leveling feet
- Cable management panel: 19" panel in 1U height to provide effective cable management
- Blank / Vented panel: Panels to cover unused space at the front of the cabinet. Available in variant sizes
- Chassis runner
- Cage net assembly



Tempered glass door or fully perforated door

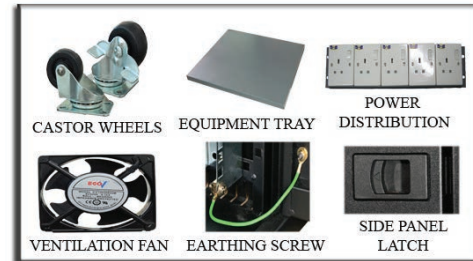

Model	Capacity (U)	Height (mm)	Weight (mm)	Depth (mm)	Packing Dimension (H*W*D)	Volume (CBM)
PG4280TR	15	800	600	800	2035 x 612 x 800	1.3418
PG42100FS	18	930	600	800	2035 x 612 x 1012	1.6722

* P = Perforated door, G = Perspex with frame
 * Customized sizes available upon request