

UC C400 PP TR U BK 24 1U

19" 1U 24P UTP Punchdown Panel, RJ45, Cat.6, 180°


4.1 Patch Panels

Specification

Item	Description
Panel	SPCC, T=1.8mm, black coated
Front Cover	ABS+PC, UL94V0
RJ45 Housing	PBT + 15% GF 94V0
Contacts and IDC	Phosphor bronze
Contact Surface Finish	50u" gold plated over contact area
IDC Surface Finish	Tin plated
IDC Housing	PC, UL94V0
PCB	FR4 94V0
Rear Cable Management	ABS+PC, UL94V0

Performance

Item	Description
Wiring	TIA 568 A/B
IDC Type	110
Insertion Force	<=30N
Plug Insertion Life	750 times insertion (RJ45, RJ11/RJ12)
Wire Size Capability	22 ~ 26 AWG solid wire

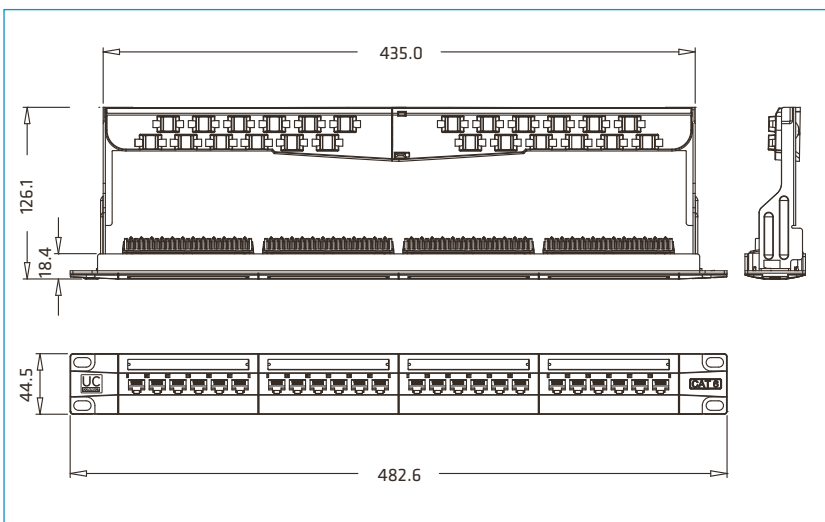

- Category 6 hardware compliant performance.
- "Write on" description label protected by clear plastic holder for clear port marking and identification.
- Supplied with rear cable management to ensure proper cable bending radius.
- Foldable rear cable management ideal for minimizing packaging size.
- Component level tested.
- RoHS Compliant.

Ordering Information

SAP IC	UC P/N	UC Material Code	Product Description	P.U
YPPBP01902	PWU0110	UC C400 PP TR U BK 24 1U	24 Port Cat6 Patch Panel 1U	1pc/box