

UC C300 PW TR U BK 24 1U V1

19" 1U 24P UTP, Punchdown Panel, RJ45, Cat.5e, 180°




- Category 5e hardware compliant performance.
- “Write on” description label protected by clear plastic holder for clear port marking and identification.
- Supplied with rear cable management to ensure proper cable bending radius.
- Foldable rear cable management ideal for minimizing packaging size.
- Optional color-coded dust cover available for port protection.
- Component level tested.

Specification

Item	Description
Panel	SPCC, T=1.8mm, black coated
Front Cover	ABS+PC, UL94V0
RJ45 Housing	PBT + 15% GF 94V0
Contacts and IDC	Phosphor bronze
Contact Surface Finish	50u" gold plated over contact area
IDC Surface Finish	Tin plated
IDC Housing	PC, UL94V0
PCB	FR4 94V0
Rear Cable Management	SPCC, black coated

Performance

Item	Description
Wiring	TIA 568 A/B
IDC Type	110
Insertion Force	<=30N
Plug Insertion Life	800 times insertion (RJ45, RJ11/RJ12)
Wire Size Capability	22 ~ 26 AWG solid wire

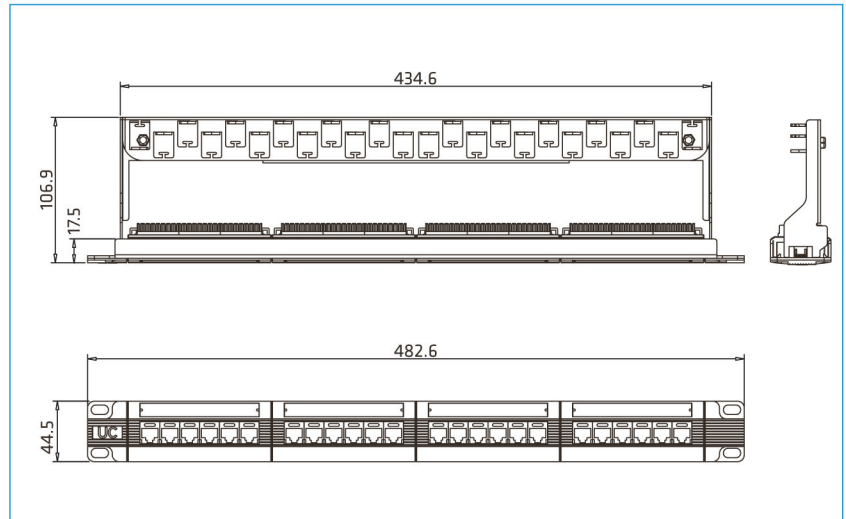

Ordering Information

SAP IC	UC P/N	UC Material Code	Product Description	P.U
YPWBP00341	PWU9746	UC C300 PW TR U BK 24 1U V1	19" 1U 24P UTP, Punchdown Panel, RJ45, Cat.5e, 180°	1pc/box