

# UC C500 KJ TF S V3 / V4

Keystone Jack, Cat. 6A, RJ45, FTP, 90° Tool Free, Shielded, Ease Connect /  
Keystone Jack, Cat. 6A, Stranded, RJ45, FTP, 90° Tool Free, Shielded, Ease Connect

## Specification


Item	Description
<b>Material Housing</b>	Zinc Die Casting PA
<b>Insulation Material</b>	PC White
<b>Contact Area</b>	30 µ Gold Plated
<b>Wire size compatibility</b>	5-10 mm
<b>Connection class</b>	IP20
<b>Dimensions</b>	19.3 x 14.7 mm
<b>Housing</b>	Zinc die cast Nickel plating
<b>Dimensions</b>	41 x 24 x 18 mm

## Performance

Item	Description
<b>Contact resistance</b>	≤20m
<b>Insulation resistance</b>	≥500m
<b>Operating temperature</b>	-40 ° C - +70 ° C
<b>Durability</b>	Jack 800 cycles



- 10Gigabit Component level compliance to ISO/IEC 11801:2002 (including Amendment 2 – 2nd Edition), Amendment 2 to CENELEC EN 50173-1 (2010) and IEC 60603-7-51, ANSI TIA 568-C.2
- Easy install facilitated by tool free wire termination
- Fully compatible with our full range of faceplates, adapters and boxes
- PoE+ IEEE 802.3at suitable for Power over Ethernet plus
- Fits into 32 mm back-box/floor-box/grid box with angled adapter

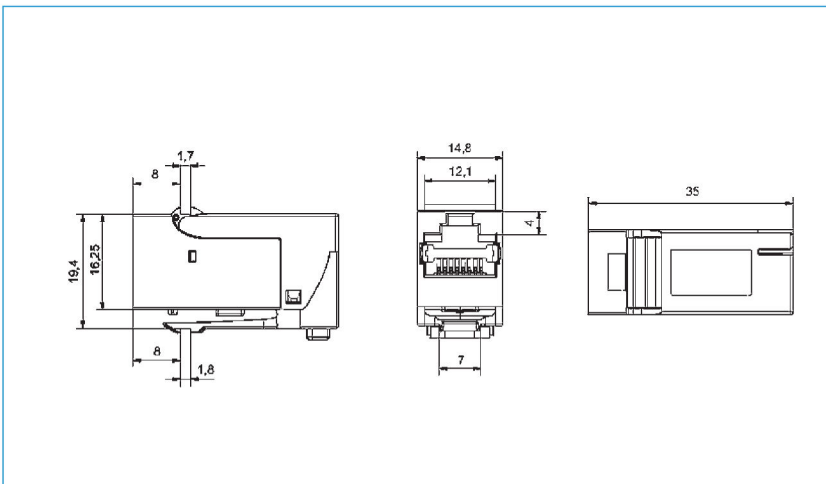

SAP IC	UC P/N	UC Material Code	Product Description	P.U
<b>YMJB00296</b>	KJTF1272	UC C500 KJ TF S V3	Keystone Jack, Cat. 6a, RJ45, FTP, 90° Tool Free, Shielded, Ease Connect	1pc/bag
<b>YMJB00297</b>	KJTF1273	UC C500 KJ TF S V4	Keystone Jack, Cat. 6a, Stranded, RJ45, FTP, 90° Tool Free, Shielded, Ease Connect	1pc/bag